

FIJA Group

DEL

SWIMMING POOL DEVELOPMENT AND INNOVATION

ABOVE-GROUND  
AUTOMATIC COVER<sup>®</sup>  
dune



DESIGN  
INNOVATION

[www.del-piscine.fr](http://www.del-piscine.fr)

ABOVE-GROUND  
AUTOMATIC COVER<sup>®</sup>  
**dune**



NEW BUILD



REFURBISHMENT



SOLAR OPTION

## SPECIFICATIONS

For pools from 2.5 x 3 m up to 10 x 15 m or 9 x 18 m. Available in electric or solar versions.



SOLAR 2 PANELS

SOLAR 3 PANELS

- 1 Heat moulded plastic and composite casing tinted champagne grey metallic and shiny black. Excellent resistance to impacts and scratches. High resistance to UVs.
- 2 Solar version: glass solar panel with photovoltaic cells. The number of solar panels varies depending on pool size.
- 3 Tubular electric motor, 120 or 250Nm - 24Vcc. The motor can be uncoupled and removed. Optional manual winch. It is used to open or close the pool manually if there is a power failure. Torque limiter: used to stop the cover from opening if an abnormal strain is detected on it.
- 4 3 position key operated switch to avoid any unplanned manoeuvres.
- 5 Cover composed of opaque PVC or polycarbonate solar slats fitted with locking kits. Slats available in several colours: white, blue, beige, medium grey or cristal/ black for perfect matching with your environment.

THE ABOVE-GROUND AUTOMATIC COVER **dune**® COMBINES LEADING EDGE TECHNOLOGY AND A DESIGN APPROACH THAT LEAVES NO ROOM FOR COMPROMISE. SOLAR OR ELECTRIC, IT ADAPTS PERFECTLY TO NEW BUILD OR POOL REFURBISHMENT PROJECTS

## POWER

The above-ground automatic cover **Dune**® has a powerful tubular motor and is perfectly suited to large pools. Its solar version requires no works and is perfectly suited to refurbishment projects.

## SAFETY

As all DEL covers, **Dune**® is certified by the French National Test Laboratory and is compliant with standard NFP 90-308 relative to the pool safety Act. Composed of opaque PVC slats and locking kits, it makes it possible to completely close the pool, preventing access by children under 5.

## DESIGN

Born from the collaboration between a designer and our research and development laboratory, **Dune**® is a unique above-ground concept covers in which the design prefigures leading edge technology. Its champagne grey colour allows it to be perfectly integrated into the environment.



5

POLYCARBONATE SOLAR CRISTAL/BLACK

PVC WHITE

PVC BLUE


PVC BEIGE

PVC MEDIUM GREY 2


### MAXIMUM SAFETY

An indispensable addition to DEL covers, the safety kits make it possible to guarantee the complete closure of your pool. A wide range of colours makes it possible to match the kits to your coating colour. Ask your pool professional for advice.



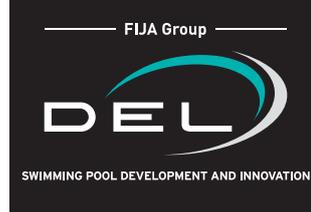

## SIZE

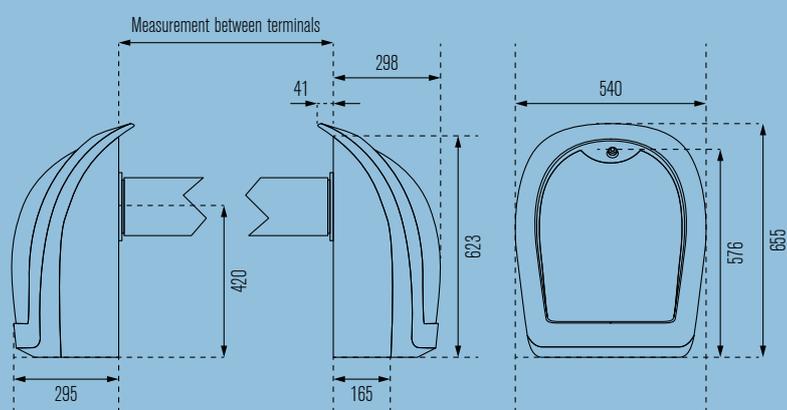

The purpose of DEL safety covers is not to replace the vigilance of parents and/or responsible adults which remains the essential factor for the safety of young children. DEL automatic covers are safety covers designed to prevent children under 5 years old from accessing the pool. A child can drown in under 3 minutes, no type of protective measure can replace the monitoring and vigilance of a responsible adult.

Please read carefully and keep in a safe place.

Dune® is a pool safety cover designed to prevent children under 5 years old from accessing the pool. This product complies with the NF P 90-308 standard. It is not a substitute for common sense or personal responsibility. The purpose of this cover is not to replace the vigilance of parents and/or responsible adults which remains the essential factor for the safety of young children. A child can drown in under 3 minutes: no type of protective measure can replace the monitoring and vigilance of a responsible adult. **Warranty:** 3 years for the slats and 2 years for the electric equipment in compliance with our general sales terms and conditions. **Order forms:** For the cover to be correctly fitted to the pool it is essential to supply a drawing of the pool with measurements taken every metre. In compliance with standard NF P 90-308, the gap between the inside of the pool and the edge of the cover must be less than 70 mm. **Manoeuvre time:** 3 minutes for automatic opening or closure plus 30 seconds to lock or unlock the safety locking system. Dune® can be opened and closed by a single person. **Use:** In all seasons. For the cover to operate correctly maintain a constant water level corresponding to normal pool filtering. It is essential to fit a water level regulator. The water level must be compliant with the instructions. **Use limitations:** The installation of an automatic DEL cover on overflow pools and/or pools with steps on the length side (removable steps on the side) is not compliant with standard NFP 90-308. In this case please use other compliant equipment. Unless otherwise specified by the manufacturer, immersion alarms are not compatible with DEL automatic covers. **Wintering:** Close the pool for winter depending on the geographic location. Without lowering the water level, close the cover in the safety position and eventually install a wintering net to protect the cover. If the water level is dropped to put the parts to insert above the water line, roll the cover and secure the pool using a safety wintering cover. **Packing list:** For 5 x 10 m pool. Slats: 5 packs of 5.10 x 0.25 x 0.20 m. Stand: 1 pack 5.46 x Ø 0.20 m. Supports: 1 pallet of 1.20 x 0.80 x 0.50 m. Weight: 282 kg.

**Manufacturer:** DEL La Basse Croix Rouge 35530 BRECE - France. [export@del-piscine.fr](mailto:export@del-piscine.fr) - [www.del-piscine.fr](http://www.del-piscine.fr).

For more information about your project ask your pool professional for advice.

Distributor's stamp