

# GRP FILTERS WITH LATERALS




**TECHNOL d.o.o.**  
ENGINEERING & GRP PRODUCTION L.t.d.




# Adriatic -S

- Diameters from 600 to 2.400mm
- Internal liner by DIN18820
- Lateral system with PP arms
- Backwashing only with water
- Flanges in PVC
- Working pressure 2.5bar, higher pressure on request
- Filtration sand height 1.000mm and 1.200mm
- Lifting ears
- GRP ring support
- Delivery in 2or 3pieces with laminating on site possible
- Possible also lower filters
- Warranty 5 years

- Durchmesser 600 bis 2.400 mm
- Waschen nur mit Wasser
- Alle Anschlüsse in PVC
- Filtrationshöhe 1.000 und 1.200 mm
- GFK runden Sockel
- Filterbehälter mit Star/Lateral Distribuzion
- Betriebsdruck: 2,5bar
- Interne Chemieschutzschicht nach DIN 18820
- Kranösen
- Lieferung in geteilter Ausführung und Vor Ort Laminierung auch möglich
- Farbgebung auf Kundenwunsch nach RAL
- Gewährleistung 5 Jahre

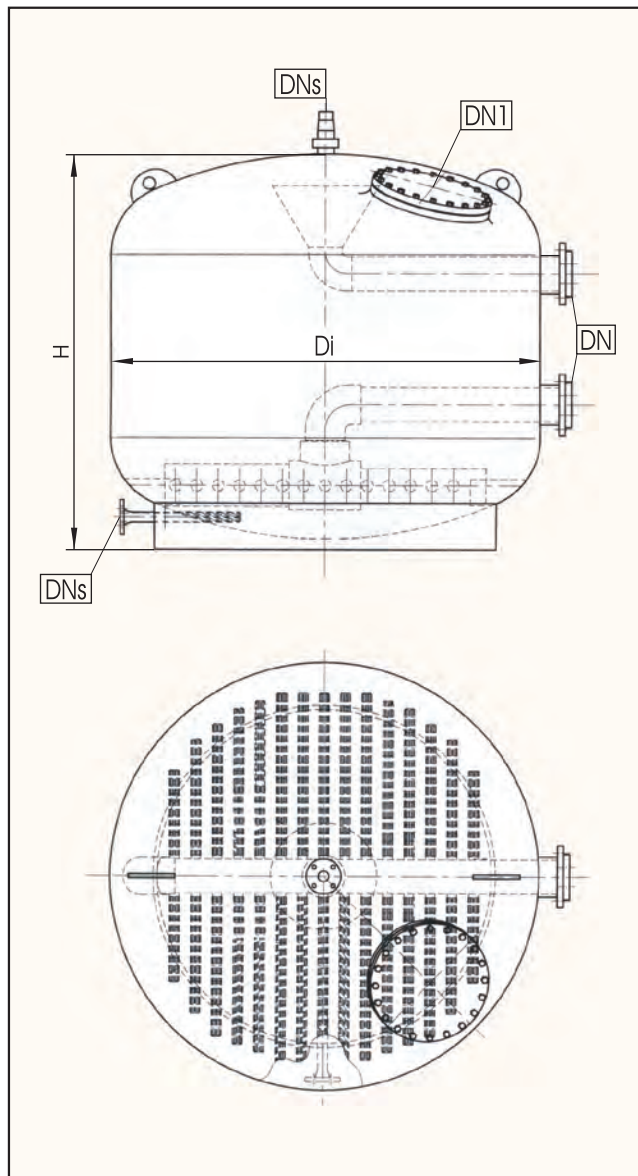

FILTER Di mm	FILTER AREA m <sup>2</sup>	DN	DNs	DN1	FILTRATION SPEED m/h		H=1000 sand	H=1200 sand
					30m/h	50m/h	H mm	H1 mm
600	0,28	50	25	200	9	14	1800	2000
800	0,50	80	40	200	15	25	1800	2000
1000	0,78	100	40	200	24	40	1800	2000
1200	1,13	100	40	300	33	57	1800	2000
1300	1,33	100	40	300	43	72	1800	2000
1400	1,54	125	40	400	46	80	1850	2050
1600	2,01	125	40	300	60	100	1850	2050
1800	2,54	125	40	400	75	130	2000	2200
2000	3,14	150	50	400	95	160	2000	2200
2200	3,80	150	50	400	115	190	2100	2300
2400	4,52	150	50	400	138	226	2100	2300



**TECHNOL Portorož d.o.o**  
 PODJETJE ZA INŽENIRING IN PROIZVODNJO  
 IZDELKOV IZ UMETNIH MAS  
 Industrijska c. 6, 6310 IZOLA - SLOVENIJA  
 Tel.: ++386/5/6625-340 Fax: ++386/5/6625-341  
 E-mail: [technol@siol.net](mailto:technol@siol.net) [www.technol.si](http://www.technol.si)